


CLAYMORE Capon

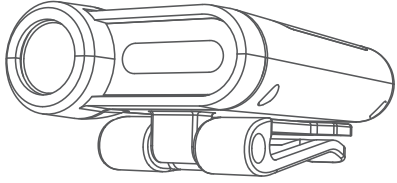

사용설명서


크레모아 캡은 65A+ CLP-330(BK/TN)

본 제품은 리튬폴리머 충전지를 내장한 휴대용 조명기구 제품입니다.
제품을 사용하기 전에 취급 설명서를 반드시 읽고 잘 보관하여 주십시오. 제품에 이상이 확인되는 경우 사용을 중지해 주시고 구입하신 판매점 또는 A/S센터(1588-2303)로 연락해 주시기 바랍니다.

주의 사항

- ① 화기 또는 난방기구 등 고온 주변에서는 사용을 금하여 주십시오. 폭발 및 발화의 원인이 될 수 있습니다.
- ② 본 제품은 생활방수가 가능합니다. 단, 장시간 빗속에 방치하시면 고장의 원인이 될 수 있습니다. 실수로 물에 빠트렸다면 빠르게 건져서 잘 닦아 주시기 바랍니다.
- ③ 직사광선에 노출된 차량 안에서 보관 및 사용하지 않아 주십시오. 폭발 및 고장의 원인이 될 수 있습니다.
- ④ 사용 중에는 본체가 매우 뜨거워질 수 있으므로 광원부를 직접 만지지 마십시오.
- ⑤ 사용 온도(-10℃~40℃)의 범위를 넘는 조건에서는 사용을 금하여 주십시오.
- ⑥ LED 광원을 직접 쳐다 보지 마십시오.
- ⑦ 영유아의 손이 닿는 곳에 두지 않아 주십시오. 부품을 삼키거나 상해를 입는 원인이 될 수 있습니다.
- ⑧ 어린이가 사용하는 경우 보호자의 감시가 필요합니다. 상해 또는 감전의 원인이 될 수 있습니다.
- ⑨ 점접촉부나 커넥터의 단자부는 금속류를 절대로 긁으면 안됩니다. 발열, 폭발, 감전의 원인이 됩니다.
- ⑩ 분해나 개조는 절대로 금합니다.
- ⑪ 젖은 손으로 커넥터 부분을 만지면 안됩니다. 감전의 위험이 있습니다.
- ⑫ 사용 후에는 반드시 전원을 끄고 보관하여 주십시오. 누액의 원인이 될 수 있습니다.
- ⑬ 각도 조절시 무리하게 꺾지 않아 주십시오. 제품 손상의 원인이 될 수 있습니다.
- ⑭ 제품 본체가 낙하 또는 충격을 받으면 제품 내부에 손상이 축적되어 통상적인 사용에도 예상치 못한 고장이 발생할 수 있습니다. 본체에 충격이 가해지지 않도록 주의하여 주십시오.

각 부의 명칭

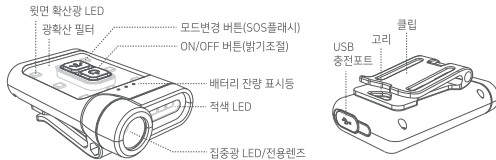

제품 조작 방법

ON/OFF

상단의 **ON** 버튼을 짧게 한번 누르면 불이 켜집니다. 다시 짧게 한번 누르면 꺼집니다.

밝기조절(미세)

전원 ON상태에서 **ON** 버튼을 계속 누르고 있으면 점점 밝아지고, 다시 계속 누르면 5단계로 점점 어두워집니다.
※ 최대/최소 밝기시 한번 깜빡입니다.

밝기조절(단계)

미세 밝기조절을 원하지 않을 경우, 전원버튼을 누른 상태에서 모드변경 버튼을 바로 누르면 5단계로 밝기 조절이 가능합니다.

모드변경

켜진 상태에서 **ON** 버튼을 짧게 누르면 집중광>확산광(RED)>확산광(잇면)순서로 변경이 가능합니다.

모드1
집중광(12°)

원거리를 집중적으로 밝게 비추고 삼을 때 사용하십시오.

모드2
확산광(RED)

최소한의 빛을 발산하는 적색 LED는 신호용으로 적합하여 미기 교체시 사용하십시오.

모드3
확산광(잇면)

빛을 넓고 고르게 확산 시켜 캠핑편으로 사용시 적합합니다. * CLP-320BK(Cool), CLP-320TN(Warm)

SOS-플래시

각 모드에서 **ON** 버튼을 2초간 길게 누르면 LED발광부가 SOS신호로 점멸합니다.

제품의 충전

고무 커버를 열고 좌측의 포트에 USB C타입 충전케이블을 연결하면 충전이 시작됩니다.

※ 메모리 기능이 있어 전원 OFF 후 다시 켜릴 경우 이전 사용한 밝기와 모드로 켜지게 됩니다.

※ 완전 방전 시 충전 케이블을 꽂을 경우, LED 조명이 순간 반짝입니다. 이는 정상적인 현상이므로 불량이 아닙니다.

배터리 잔량 체크


제품 충전시 배터리 잔량 표시등이 깜빡이며 3단계로 충전량을 나타냅니다.
(사용시 **ON** 전원버튼을 누를때마다 잔량이 표시됩니다.)

배터리 잔량 표시등	깜빡임
● ● ● 0~33%	
● ● ● 33~66%	
● ● ● 66~99%	
● ● ● 완충시	멈춤

제품 사용방법

● 모자 착용시


제품 하단의 클립을 모자 챙의 끝까지 밀어 넣은 후 각도를 일맞게 조정하여 사용하십시오.



※ 클립을 끝까지 끼우지 않으면 탈락의 위험이 있으니 침주어 끝까지 밀어 넣어주시기 바랍니다.


● 각도 조절 기능

180°까지 각도 조절이 가능하여 집중광과 확산광 사용이 편리합니다.



● 랜턴고리 사용시

고리에 카라비너를 걸어 사용하거나 클립 각도를 조절하여 스트랩(걸이용 줄)에 걸어 사용가능합니다.



제품 사양

	CLP-330BK/TN	CLP-330BK/TN	CLP-330BK	CLP-330TN
	집중광(12°)	확산광(RED)	확산광(주광색)	확산광(전구색)
발기	최소 16Lm 최대 230Lm	최소 1Lm 최대 20Lm	최소 16Lm 최대 230Lm	최소 15Lm 최대 220Lm
사용시간	19시간 3시간	19.5시간 3.5시간	19시간 3시간	19시간 3시간
빛 도달거리	3m 50m			

제품명	크레모아 캡은 65A+	사이즈	38.6×63.6×24.3mm
모델명	CLP-330(BK/TN)	제품 중량	35g
배터리 타입/용량	Li-Polymer 3.7V 650mAh(2.40Wh)	충전 시간	1시간 40분
충전 및 전원	USB 5V 1A	제조국	대한민국
LED 색온도	CLP-330BK(주광색(Cool)) : 5,700K (±15%), Red CLP-330TN(주광색(Cool)) : 5,700K / 전구색(Warm) : 3,000K (±15%), Red		

전기용품 안전인증번호 (배터리) YU101255-20001
전자파 적합성평가등록번호 (랜턴) R-R-Prs-CLP-320BK
이 기기는 가용(8dB) 전자파침입기까지로서 가장에서 사용하는것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.

구성품



△ 제품 장기 보전시 유의사항

- * 완전방전 방전된 후 충전시 잔량표시등이 깜빡이지 않을 수 있습니다. 그럴 경우 USB 케이블을 다시 꽂거나 버튼을 누르면 잔량 표시등이 다시 작동합니다.
- * 장시간 배터리 100% 충전하여 보관하세요
- * 영하10도 이하에서 보관하시면 배터리의 수명에 영향을 있을 수 있으니 주의 바랍니다.
- * 습기가 없는 건조한 곳에서 보관하여 주시기 바랍니다.

품질 보증서

제품명	크레모아 캡은 65A+
모델명	CLP-330(BK/TN)
구입처	
구입 일자	

1. (주)프리즘의 크레모아 제품을 구입해 주셔서 대단히 감사합니다.
2. 본 제품은 엄격한 품질 관리와 시험을 거쳐 출하되었습니다.
제품 사용 중 이상이 있을 시에는 하기와 같이 A/S 서비스를 받으실 수 있습니다.

무상 서비스

- 1) 품질보증 기간 내에 정상적인 사용으로 발생한 기능상의 하자에 대해서는 무상으로 수리해 드리거나 수리가 불가할 경우 새 제품으로 교환해 드립니다.
- 2) 품질 보증기간 : 1년 / 부품 보증기간 : 3년

유상 서비스

- 1) 품질보증 기간이 경과한 후 발생한 성능 불량 및 고장
- 2) 소비자의 고의 및 과실로 인하여 발생한 고장
- 3) 당사의 서비스 센터가 아닌 곳에서 수리 또는 개조하여 발생한 불량
- 4) 사용 전원의 이상이나 접속기구의 불량으로 인한 고장
- 5) 천재지변에 의한 제품의 결함 또는 불량

P1보험(생산물 배상 책임 보험) 10억원 가입


본 제품은 기획재정부 소비자 피해보상 기준에 의거 교환 또는 보상 받으실 수 있습니다.
* 제품의 외관, 사양 등은 제품개발을 위해 사전 예고 없이 변경될 수 있습니다.

제조업

(주)프리즘 www.prismlight.co.kr
본사/공장 인천광역시 부평구 평천로 221
AS센터 서울특별시 강서구 마곡중앙8로 1길 20 프리즘 마곡빌딩
A/S 문의: (주)프리즘 또는 구입처 1588-2303



CLAYMORE Capon

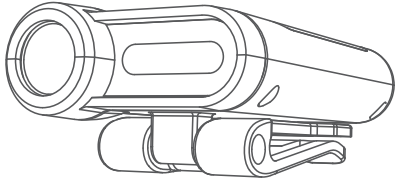

User Manual


CLAYMORE Capon 65A+ CLP-330(BK/TN)

This portable light contains Li-Polymer batteries. Please follow the user manual before use. If any abnormality is found in the product, discontinue use and contact the dealer or a service center where the product was purchased. Any modifications of this product will void the warranty. Misuse of CLAYMORE products may cause user harm.

Caution

- Do not use near high temperatures such as fires or heating equipments. It may cause explosion and ignition.
- This product is water resistant. However, if left in the rain for a long time, it may cause malfunction. If the product gets soaked, please quickly wipe it off.
- Do not store or use in vehicles exposed to direct sunlight. It may cause explosion and malfunction.
- Do not touch the light source directly as it may become very hot during use.
- Do not use if the product exceeds the operating temperature range (-10 °C to 40 °C).
- Do not look directly into the LED light source.
- Please do not place in the reach of infants. It may cause swallowing of parts or injury.
- Adult supervision is necessary when used by children. Misuse of head lamp may cause injury or electric shock.
- Do not insert any metal parts into the terminal block of the connector. It may cause heat, explosion or electric shock.
- Do not disassemble or modify the product.
- Do not touch the connector with wet hands. There is a danger of electric shock.
- After use, be sure to turn off the power. If not, it may cause leakage.
- When adjusting the angle, please do not bend with force. It may cause damage to the product.
- Dropping or impacting the product can cause damage to the inside of the product, resulting in unexpected failures in normal use. Be careful not to apply impact to the body.

Components

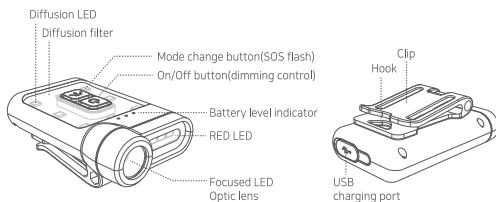

Operation

ON/OFF



Light turns on when pushing button shortly.
Repeat to turn off the light.

Stepless Dimming



When light is on, press and hold button to increase brightness.
Repeat to decrease brightness.

5 STEP Dimming



Hold down button and press button to sequence to adjust brightness in 5 steps.

※ Light will blink once when Maximum and Minimum brightness is reached.

CCT Change



When light is on, press button shortly to change

※ 3 different light modes (Focused>Red>Flood)



MODE1
Focused Light(12°)
Long distance (narrow)



MODE2
Diffused Light(Red)
Short distance (wide)



MODE3
Diffused light (top)
Short distance(wide)
CLP-320BK(Cool)



Diffused light (top)
Short distance(wide)
CLP-320TN(Warm)


SOS-Flash



When light is on, press button over 2 seconds to access SOS signal in any mode.

Charging method

Open rubber cover and connect USB cable to charge.



※ This lantern contains memory function that returns to the last setting it was set at.

Battery Level Check

When charging, battery indicator will flicker in 3 steps to show remaining battery.
(To see remaining battery, press button)




Battery level indicator

● ● ● 0~33%	Flickers
● ● ● 33~66%	Flickers
● ● ● 66~99%	Flickers
● ● ● Fully charged	Stop

Instructions

● Attaching to a cap


Fully insert clip to the visor of the hat and adjust angle to use properly.



※ Please check if the clip is fully attached to cap bill before use.

● Angle adjustment


Able to adjust up to 180 degree and easy to use focused and diffused light.







Max 180 degree

● Lantern Hook

Compatible with carabiner or hang on string with hook.



Specification

	CLP-330BK/TN		CLP-330BK/TN		CLP-330BK		CLP-330TN	
								
	Focused Light(12°)		Diffused light(Red)		Diffused light(Cool)		Diffused light(Warm)	
Brightness	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
	16Lm	230Lm	1Lm	20Lm	16Lm	230Lm	15Lm	220Lm
Operating time	19hour	3hour	19.5hour	3.5hour	19hour	3hour	19hour	3hour
Distance	3m	50m						
Product name	CLAYMORE Cap on 65A+				Size	38,6×63,6×24,3mm		
Model name	CLP-330(BK/ TN)				Weight	35g		
Battery capacity	Li-Polymer 3.7V 650mAh(2,40Wh)				Charging time	1 hour 40 minute		
Input	USB 5V 1A				Origin	MADE IN KOREA		
Color temperature	CLP-330BK I Cool : 5,700K (±15%), Red CLP-330TN I Cool : 5,700K / Warm : 3,000K (±15%), Red							

Contents



① Capon 65A+



② Carabiner



③ Pouch



④ USB charging cable (USB Type-C)

⚠ Caution for long-term storage

- If the battery is completely drained, the battery indicator might not flash. If this happens, plug in USB cable back in or press the button to turn the battery indicator on again.
- For long-term storage, fully recharge the battery. (Repeat every six months)
- Please keep in mind that if stored below -10°C the battery life may be affected.
- Please keep in a dry place without moisture.

Warranty

Item	CLAYMORE Capon 65A+
Model No.	CLP-330(BK/TN)
Seller	
Date of Purchase	

- Thank you for purchasing CLAYMORE series of Prism Co., Ltd.
- This product has passed strict quality control tests. If the product is not functioning properly, please contact an authorized service center.

Free Service

- Failure of the product under normal operating conditions during the warranty period will be repaired by Prism or authorized service center on free of charge. Some shipping or handling charges may be involved.
- Warranty period: 1 year.

Charged Service

- Damage caused when the warranty period is over.
- Damage caused due to the user's mishandling, abuse, or improper operation.
- Damage caused by arbitrary or personal repair or disassemble in unauthorized service center.
- Damage from input electricity or cable defect.
- Damage caused by natural disaster.

CLAYMORE

Prism Co., Ltd.

221, Pyeongcheon-ro, Bupyeong-gu, Incheon, Republic of Korea
www.claymoredlight.com • www.prismlight.co.kr • info@prismlight.co.kr